


Heatsinks for Power Semiconductor Devices

功率半导体器件用散热器


Air-cooling heatsinks 风冷散热器



型号 Type	外形尺寸 Outline Dimensions			导电排尺寸 Conductor Plate Dimensions			安装尺寸 Install Dimensions															
	mm			mm			mm															
	L	D	H	L1	D1	H1	L2	D2	H2	H3	d	d1×h1	a	b	c	e	f	g	i	j	h	d3
SF11	170	110	125	60	40	8	33	80	55	22	2 holes 13	2 screw holes M6-6H-20	20	—	20	55	—	30	6	20	—	M3
SF12	200	110	125	60	40	8	33	80	55	22	2 holes 13	2 screw holes M6-6H-20	20	—	20	55	—	30	6	20	—	M3
SF13	220	120	130	60	40	8	33	90	58	45	2 holes 13	2 screw holes M6-6H-20	20	—	20	64	—	53	6	20	—	M3
SF14	250	140	145	80	50	10	38	105	65	45	4 holes 11	4 screw holes M6-6H-20	12.5	25	12.5	40	35	55	8	20	25	M3
SF15	280	140	165	80	60	12	38	105	75	50	4 holes 11	4 screw holes M8-6H-20	17.5	25	15	40	35	62	8	20	25	M3
SF16	280	180	200	80	60	12	34	130	82	66	4 holes 13	4 screw holes M8-6H-20	17.5	25	15	30	40	78	8	20	25	M3
SF17	300	200	215	80	60	12	40	140	100	73	4 holes 13	4 screw holes M8-6H-20	17.5	25	15	40	40	85	8	20	25	M3
SF17 A	300	200	225	80	60	12	40	140	100	82	4 holes 13	4 screw holes M8-6H-20	17.5	25	15	40	40	94	8	20	25	M3
SF18	390	240	225	90	70	13	45	150	100	72	4 holes 13	4 screw holes M8-6H-20	22.5	25	20	80	50	85	8	20	25	M3
SF18 A	390	240	225	90	70	13	45	185	100	72	4 holes 13	4 screw holes M8-6H-20	22.5	25	20	80	50	85	8	20	25	M3

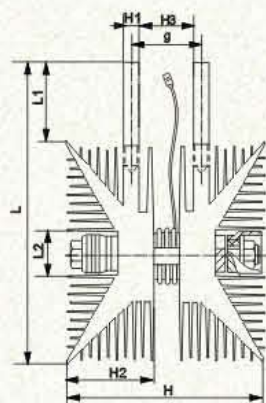

SF11, SF12, SF13 forced air-cooling heatsink(with disc device)

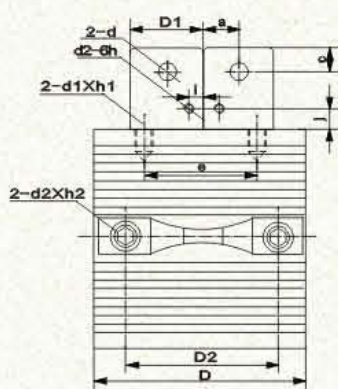

SF14, SF15, SF16, SF17, SF17A, SF18, SF18A
forced air-cooling heatsink (with disc device)

